

LZM SERIES PANEL MOUNTING IN-LINE ROTAMETERS

STANDARD FEATURES:

- CONSTRUCTED OF STAINLESS STEEL, ACRYLIC & ABS
- DUAL SCALES IN LITRES & GALLONS PER MINUTE
- MAXIMUM WORKING PRESSURE 10 BAR
- MAXIMUM TEMPERATURE 60°C
- BSP PIPE THREADS
- SUITABLE FOR WATER & COMPATIBLE LIQUIDS WITH AN SG OF 1
- 12 MONTH WARRANTY*



MODEL:

Model	Flow Rate	Dimensions	Connections
LZM-15-4	0.5 to 4 LPM	220 x 32 x 38mm (h x w x d)	1/2+BSPT male
LZM-15-8	0.8 to 8 LPM	220 x 32 x 38mm (h x w x d)	1/2+BSPT male
LZM-15-18	2 to 18 LPM	220 x 32 x 38mm (h x w x d)	1/2+BSPT male
LZM-15-28	2 to 28 LPM	220 x 32 x 38mm (h x w x d)	1/2+BSPT male
LZM-20-40	8 to 40 LPM	233 x 39 x 44mm (h x w x d)	3/4+BSP male
LZM-20-60	8 to 60 LPM	233 x 39 x 44mm (h x w x d)	3/4+BSP male
LZM-20-80	8 to 80 LPM	233 x 39 x 44mm (h x w x d)	3/4+BSP male
LZM-25-60	6 to 60 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male
LZM-25-170	20 to 170 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male

OPTIONS:


Smaller and larger sizes, alternative flow ranges and alternative materials, are available on request.

* Please refer to Aqua Products Limited terms and conditions of sale for complete warranty conditions.

LZM-Z SERIES PANEL MOUNTING ROTAMETERS WITH FLOW CONTROL

STANDARD FEATURES:

- BUILT IN STAINLESS STEEL FLOW CONTROL VALVE
- CONSTRUCTED OF STAINLESS STEEL, ACRYLIC & ABS
- DUAL SCALES IN LITRES & GALLONS PER MINUTE
- MAXIMUM WORKING PRESSURE 10 BAR
- MAXIMUM TEMPERATURE 60°C
- BSP PIPE THREADS
- SUITABLE FOR WATER & COMPATIBLE LIQUIDS WITH AN SG OF 1
- 12 MONTH WARRANTY*

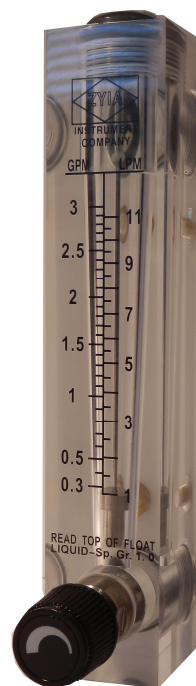

MODEL:

Model	Flow Rate	Dimensions	Connections
LZM-15ZT-4	0.5 to 4 LPM	175 x 35 x 40mm (h x w x d)	1/2+BSP
LZM-15ZT-7	0.7 to 7 LPM	175 x 35 x 40mm (h x w x d)	1/2+BSP
LZM-15ZT-11	1 to 11 LPM	175 x 35 x 40mm (h x w x d)	1/2+BSP
LZM15-ZT-18	2 to 18 LPM	175 x 35 x 40mm (h x w x d)	1/2+BSP
LZM25-ZT-60	6 to 60 LPM	234 x 45 x 46mm (h x w x d)	1+BSP
LZM25-ZT-170	17 to 170 LPM	234 x 45 x 46mm (h x w x d)	1+BSP

OPTIONS:

Smaller and larger sizes, alternative flow ranges and alternative materials, are available on request.

* Please refer to Aqua Products Limited terms and conditions of sale for complete warranty conditions.

LZM-SW SERIES PANEL MOUNTING ROTAMETERS WITH ALARM LIMIT SWITCH

STANDARD FEATURES:

- AVAILABLE WITH LOW AND/OR HIGH FLOW LIMIT SWITCHES
- CONSTRUCTED OF STAINLESS STEEL, ACRYLIC & ABS
- DUAL SCALES IN LITRES & GALLONS PER MINUTE
- MAXIMUM WORKING PRESSURE 10 BAR
- MAXIMUM TEMPERATURE 60°C
- BSP PIPE THREADS
- SUITABLE FOR WATER & COMPATIBLE LIQUIDS WITH AN SG OF 1
- 12 MONTH WARRANTY*



MODEL:

Model	Flow rate	Dimensions	Connections
LZM-25-35-SW	5 to 35 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male
LZM-25-50-SW	10 to 50 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male
LZM-25-60-SW	6 to 60 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male
LZM-25-100-SW	10 to 100 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male
LZM-25-130-SW	10 to 130 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male
LZM-25-170-SW	10 to 170 LPM	250 x 45 x 50mm (h x w x d)	1+BSPT male

OPTIONS:

Smaller and larger sizes, alternative flow ranges and alternative materials, are available on request.

* Please refer to Aqua Products Limited terms and conditions of sale for complete warranty conditions.

LZM-G SERIES IN-LINE ROTAMETERS

STANDARD FEATURES:

- CONSTRUCTED OF STAINLESS STEEL, ACRYLIC & ABS
- DUAL SCALES IN LITRES & GALLONS PER MINUTE
- MAXIMUM WORKING PRESSURE 10 BAR
- MAXIMUM TEMPERATURE 60°C
- BSP PIPE THREADS
- SUITABLE FOR WATER & COMPATIBLE LIQUIDS WITH AN SG OF 1
- 12 MONTH WARRANTY*



MODEL:

Model	Flow rate	Dimensions	Connections
LZM-10G-45	5-45 LPH	187mm x 22mm diameter	1/2+BSP male
LZM-10G-60	6-60 LPH	187mm x 22mm diameter	1/2+BSP male
LZM-15G-4	0.4 to 4 LPM	210mm x 32mm diameter	1/2+BSP female
LZM-15G-7	0.7 to 7 LPM	210mm x 32mm diameter	1/2+BSP female
LZM-15G-18	1.8 to 18 LPM	210mm x 32mm diameter	1/2+BSP female
LZM-20G-36	4 to 36 LPM	278mm x 44mm diameter	3/4+BSP female
LZM-25G-70	10 to 70 LPM	265mm x 51mm diameter	1+BSP female
LZM-40G-170	20 to 170 LPM	306mm x 51mm diameter	1 1/2+BSP male
LZM-40G-220	80 to 220 LPM	306mm x 51mm diameter	1 1/2+BSP male
LZM-50G-300	80 to 300 LPM	380mm x 75mm diameter	2+BSP female or male
LZM-50G-450	150 to 450 LPM	380mm x 75mm diameter	2+BSP female or male
LZM-50G-750	220 to 750 LPM	380mm x 75mm diameter	2+BSP female or male

OPTIONS:

Smaller and larger sizes, alternative flow ranges and alternative materials, are available on request.

* Please refer to Aqua Products Limited terms and conditions of sale for complete warranty conditions.