

Section 21


Flow

LZM-T Series

Panel Mounting Rotameters with Flow Control

Standard Features:

- Built-in Flow Control Valve
- Constructed Metal, Acrylic & ABS
- Dual Scales in Litres & Gallons Per Minute
- Maximum Working Pressure 10 Bar
- Maximum Temperature 60°C
- BSP Pipe Threads
- Suitable for Water & Compatible Liquids with an SG of 1
- 12 Month Warranty*

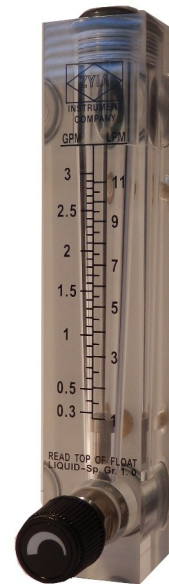

Models:

Model	Flow Rate	Dimensions HxWxD mm	Connections inch
LZM4T-60	6 to 60 ml/m	94 x 27 x 21	6mm tube
LZM8T-25	2.5 to 25 l/h	110 x 25 x 25	1/4 BSP
LZM8T-45	5 to 45 l/h	110 x 25 x 25	1/4 BSP
LZM8T-60	6 to 60 l/h	110 x 25 x 25	1/4 BSP
LZM15ZT-100	10-100 l/h	175 x 35 x 32	1/2 BSP
LZM15ZT-160	16-160 l/h	175 x 35 x 32	1/2 BSP
LZM15ZT-4	0.5 to 4 l/m	175 x 35 x 32	1/2 BSP
LZM15ZT-7	0.7 to 7 l/m	175 x 35 x 32	1/2 BSP
LZM15ZT-11	1 to 11 l/m	175 x 35 x 32	1/2 BSP
LZM15ZT-18	2 to 18 l/m	175 x 35 x 32	1/2 BSP
LZM20T-40	8 to 40 l/m	233 x 39 x 44	3/4 BSP
LZM25ZT-60	6 to 60 l/m	234 x 45 x 46	1 BSP
LZM25ZT-170	17 to 170 l/m	234 x 45 x 46	1 BSP

Options:

Smaller and larger sizes, alternative flow ranges and alternative materials are available on request. Available with stainless steel valve on request.

* Please refer to 'Aqua Products Limited' terms and conditions of sale for complete warranty conditions.